



3M Science.
Applied to Life.™



Scotch-Weld™
Structural Adhesive

Product Selection Guide

Matching 3M Structural Adhesives to your design,
performance and process requirements

EMEA May 2019

We Help You Make It. Better.

In today's world, successful new products demand advancements in design, manufacturing processes and end-use performance. Industrial engineering and design professionals around the world depend on 3M™ Scotch-Weld™ Structural Adhesives to help them design beyond the limits of mechanical fasteners to create next generation products.


Trusted innovations from aerospace to office space

With over 60 years of experience developing innovative structural adhesives for aerospace, automotive and hundreds of other industries, 3M delivers the solutions you can trust. Our advanced formulations create durable bonds, even on challenging materials or in extreme conditions.

3M global service and support

3M supports our customers with the testing, technology, and training needed to create better products. Our world-wide support staff has the experience you can rely on for everything from structural adhesive selection to process improvement.

Leverage 3M's proven selection of structural adhesives, deep industry expertise, and technical support to your advantage. Design with Confidence. Build to Last.

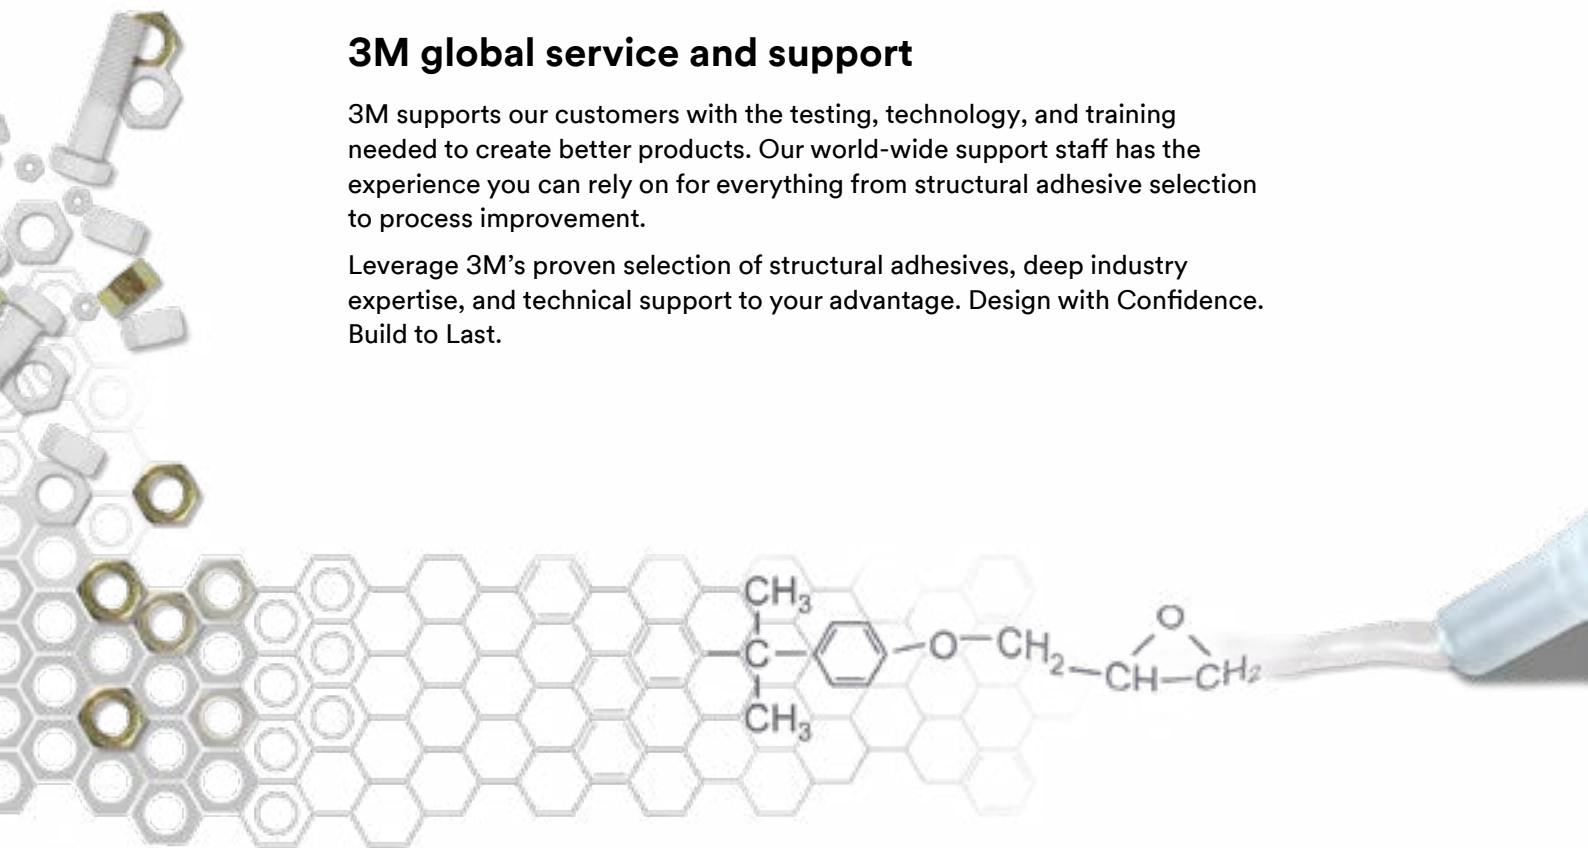

Advancing design, process and performance

The benefits of designing and building products with 3M™ Scotch-Weld™ Structural Adhesives help drive product success. Eliminating mechanical fasteners provides a wide range of benefits for all stages of product development.



Improve Aesthetics: Improve product appearance with invisible joints and smoother bond lines, reduce weight and noise, enhance corrosion and fatigue resistance, and more.

Freedom of Design: Join composites to metal, build with hard-to-bond plastics, and use thinner, lighter weight materials.



Enhance Productivity: Reduce labor and material costs, build faster with minimal surface prep and match cure rates to your process needs.

Accurate and Easy: Dispense by hand or with automated equipment, and choose from a wide range of viscosities and flow rates.



Strong, Flexible Bonds: Adhesives bond and seal simultaneously, eliminate stress concentration and absorb shock and vibration for durable bonds.


Increased Durability: Resist chemicals, environment, galvanic corrosion, fatigue, and material separation along edges or corners.

Simplifying Adhesive Decisions for Your Application

The following questions will help you narrow adhesive choices to a few possibilities for evaluation.


Q: What materials will be bonded?

A: Structural adhesives work by adhering to the top surface of the bonded parts, so it's important to know the exact material and condition on those surfaces. For metals, will the adhesive be applied to bare metal, or will there be a paint or coating on the surface? For plastics, exactly which base resin? Could there be residual release agents on the surfaces used for mold release?




Q: What is the preferred cure speed?

A: The chosen structural adhesive must have enough work life (open time, pot life) to allow proper mixing and application of the adhesive and assembling of the bonded parts. Smaller assemblies or shorter cycle time production processes may be able to use a faster curing adhesive with a work life of only five minutes or less, while larger assemblies that require alignment and clamping will probably need a work life of 20 minutes or more.




Q: What surface preparation will be required?

A: Structural adhesives generally prefer clean, rough, dry surfaces for highest bond strength. This typically means either light abrasion and solvent cleaning of the surface, or solvent cleaning followed by chemical etching or applying a primer. Adhesion tests should be performed to determine the adequate surface preparation for a specific application.




Q: What types of joints are best for structural adhesives?

A: Joint designs that put the adhesive bond under shear, tension, or compression forces will provide the highest strength. Designs that tend to apply peel or cleavage forces to the adhesive, where the applied stresses are not distributed over the entire bond area, will have lower bond strength, but the bond may still be sufficient for the needs of the application. In addition, optimum bond line thickness typically ranges from 125 μ to 500 μ . The adhesive qualification process should always include testing of prototype assemblies to ensure the adhesive will provide enough performance.




Q: How are structural adhesives used and applied?

A: Structural adhesives come in many forms, including low viscosity liquids and non-sag pastes, one- and two-component formulations, short and long work lives, and various package sizes and shapes. Most two-part structural adhesives are available in both bulk containers and convenient, easy-to-use cartridge mixing systems.



Q: What are the general characteristics of the different types of structural adhesives?

A: All structural adhesives provide at least 7 MPa of overlap shear strength to aluminum, but the different adhesive chemistries have various properties:



- **Epoxy adhesives** come in both two-part adhesives (that cure upon mixing the two components) and one-part adhesives (that cure with temperature). They generally have the highest strength and overall performance. They also provide the best resistance to high temperatures, solvents and outdoor weathering. They adhere well to metals, woods and concrete, and the flexible epoxy adhesives also bond to some plastics and rubbers. Epoxy adhesives usually require clean, abraded surfaces to obtain maximum bond strength.

- **Acrylic adhesives** are two-part adhesives that provide excellent bond strength and durability, although slightly lower than epoxy adhesives. However, they have several features that make them easier to use in many applications and manufacturing processes. These benefits include a much faster cure speed, higher tolerance for oily or unprepared bonding surfaces and the ability to bond a wide variety of materials, including nearly all plastics. Newer acrylic adhesive formulations are room temperature stable with a long shelf life, and some have much lower odor than regular acrylic adhesives.


- **Urethane adhesives** are two-part adhesives that are relatively flexible when cured, and therefore tend to have excellent impact resistance and good adhesion to most plastics. They also bond well to woods, concrete and rubbers, but they tend to have reduced resistance to solvents and high temperatures. Uncured adhesive components are sensitive to moisture.

- **Cyanoacrylate adhesives** (instant adhesives) are one-component, lower viscosity liquids that cure extremely quickly with just contact pressure and surface moisture. They adhere well, with thin bond lines, to plastics, metals and rubbers. With the use of primers, they can also adhere to low surface energy plastics and elastomers. They tend to have low flexibility, peel strength and impact resistance compared to other structural adhesives. They are generally used for applications such as gasket bonding and smaller assemblies.

- **Anaerobic adhesives** are one-part adhesives that cure on active metal surfaces when oxygen gets excluded from the bond line. These products keep your factory running efficiently, reducing maintenance and leakage. They do not bond well to glass, plastics or rubbers, and are primarily used for applications such as locking threads and sealing pipe connections.


- **PUR adhesives** (Polyurethane-reactive adhesives) are one-part adhesives that apply like a hot melt, but cure with ambient moisture for near structural strength bonds. Fast set times and build strength over the next 24-48 hours can reach as much as 7 MPa in overlap shear strength. They are flexible and resistant to temperature extremes and most solvents. Most commonly used in bonds where at least one substrate contains or transmits moisture (such as wood or plastic).

Tensile

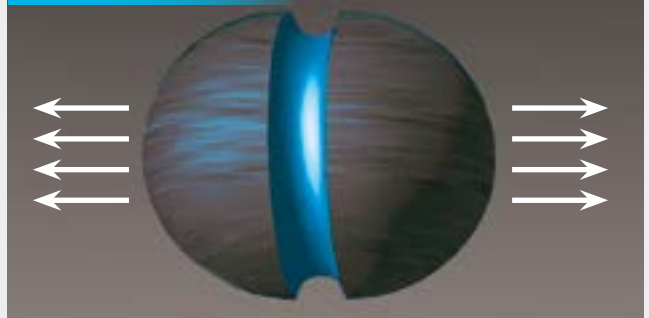


Tensile is pull exerted equally over the entire joint. Pull direction is straight and away from the adhesive bond.

Shear

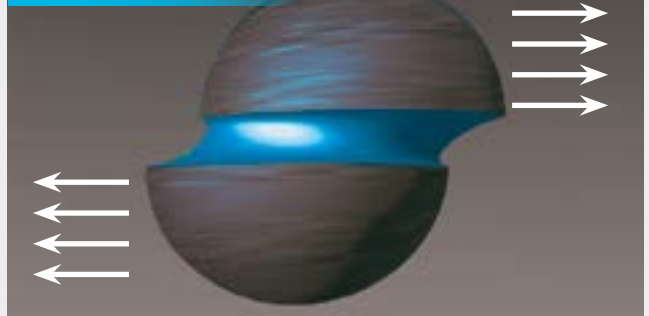


Shear is pull directed across the adhesive, forcing the substrates to slide over each other.

Cleavage

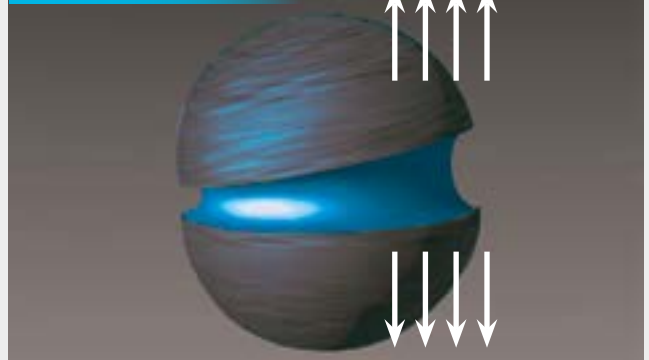

Cleavage is pull concentrated at one edge of the joint, exerting a prying force on the bond. The other edge of the joint is theoretically under zero stress.


Peel

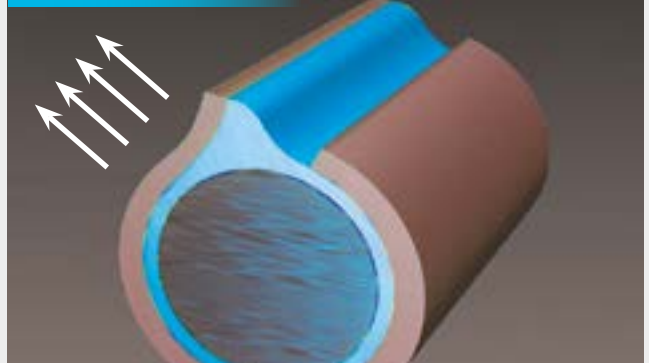

Peel is concentrated along a thin line at the edge of the bond where one substrate is flexible.

Key Markets & Applications

For 3M™ Scotch-Weld™ Structural Adhesives

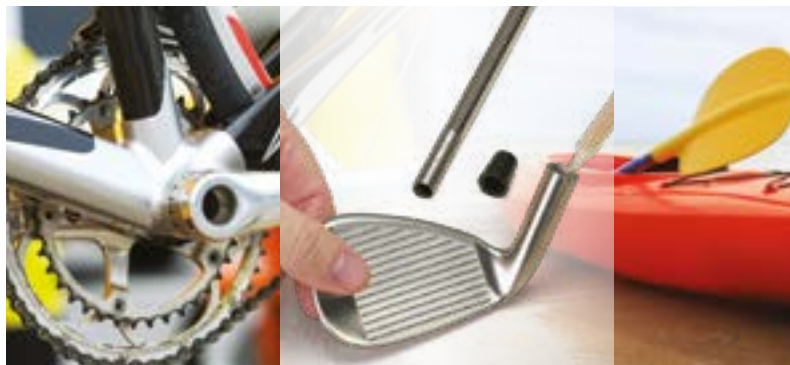

Sporting Goods

Key Features & Benefits:

- Excellent impact resistance of high stressed bonds
- High strength for small joints
- High strength bonding of rubber, composites and metals to each other

Key Products:

DP420NS Black, DP8810NS, PR100, TS230

Specialty Vehicle

Key Features & Benefits:

- Weight reduction
- High strength
- Vibration & fatigue resistance

Key Products:

DP6330NS, DP8410NS, 7260FC NS, TL42



Signage

Key Features & Benefits:

- One adhesive to bond all of your substrates
- Strong formulations and thin bond lines
- Weather resistance
- UL recognition

Key Products:

DP8805NS, DP8405NS, DP100 Plus

Metalworking

Key Features & Benefits:

- High strength and durability
- Reduced surface preparation before bonding, and no grinding after bonding
- Save weight and improve appearance with adhesives instead of welds or rivets

Key Products:

DP420NS Black, DP8407NS, DP8410NS



Electronics

Key Features & Benefits:

- Low halogen formulations available to meet customer needs
- Fast cure to speed production
- Protect sensitive electrical connections from the environment

Key Products:

DP270, DP8805NS, TS230, PR100



Appliance

Key Features & Benefits:

- Simplify operations by bonding after powdercoating
- Eliminate the challenge of bonding rigid to flexible substrates
- Noise damping
- Reduce complexity-bond and seal glass to metal in one step

Key Products:

DP125 Gray, DP6310NS, DP8810NS, TS230, TL42



Aerospace

Key Features & Benefits:

- Available in UL94 or FST compliant options
- Strong, yet flexible bond lines

Key Products:

2216 Gray, DP100FR, TL70



Plastic, Composite & Rubber

Key Features & Benefits:

- Bonding of low surface energy plastics without priming
- Impact resistant composite bonding


Key Products:

DP8010 Blue, DP190, DP6310NS, TS230, PR100, DP490



3M™ Scotch-Weld™ Adhesives Selector Guide

Step 1: Select Most Difficult Substrate **Step 2: Determine Key Attribute** **Step 3: Select Product Family**

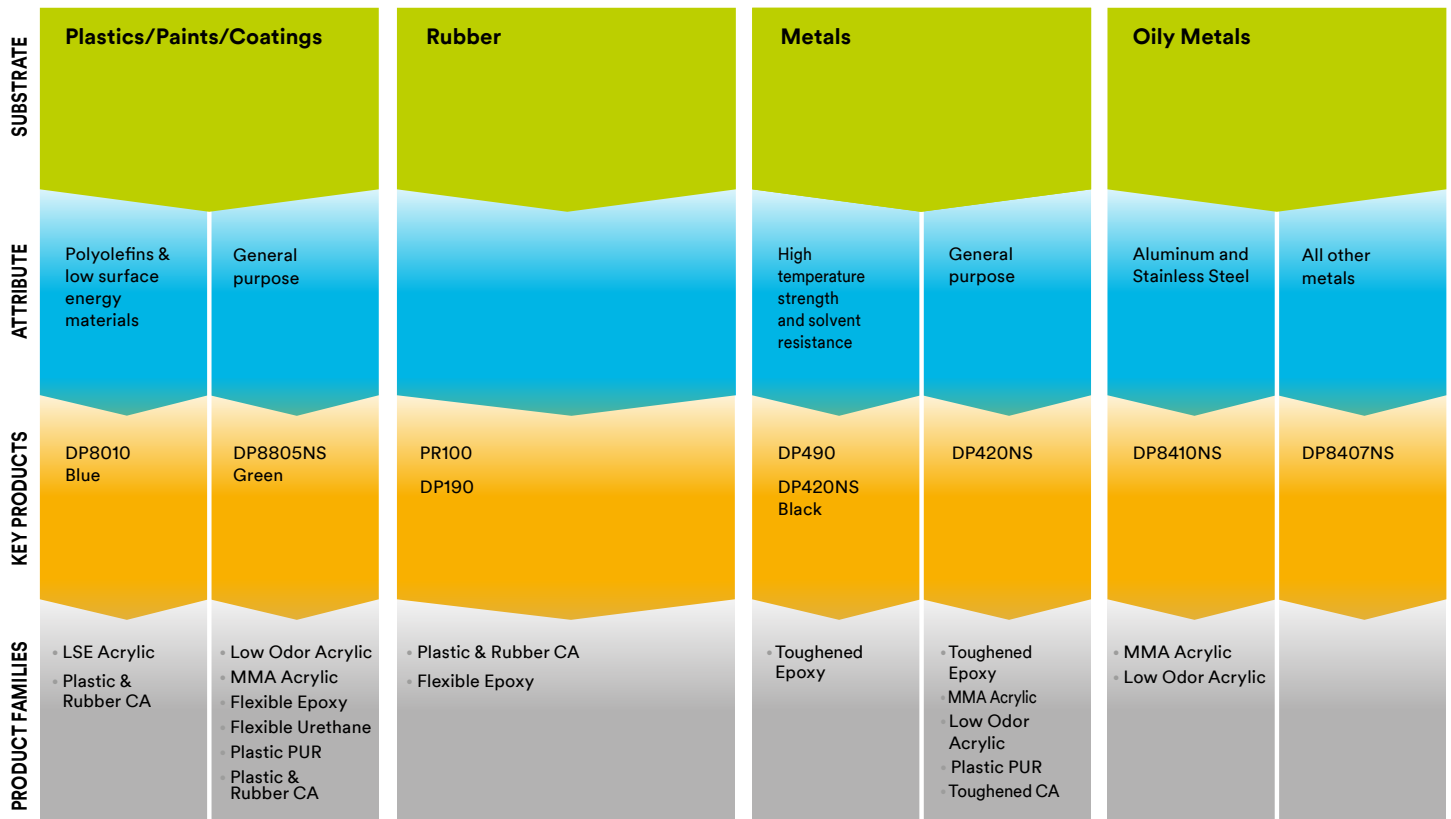

*See chart in back of guide for more details.

SUBSTRATE **ATTRIBUTE** **KEY PRODUCT** **PRODUCT FAMILIES**

Structural Adhesive Families

Rigid Epoxy Adhesives — Higher tensile strength at lower elongations for greater long-term holding power. Mostly used for rigid substrates (metals) with high static loads.

Flexible Epoxy Adhesives — Lower tensile strength at higher elongations for greater capability to withstand differential movement of bonded parts; higher peel strength and higher adhesion to most plastics.

Toughened Epoxy Adhesives — Higher tensile strength at lower elongations for fatigue resistance; best suited for dynamic stresses. They have long-term holding power, higher peel strength, and exceptional higher resistance against shock, vibration and impact loads. Lower adhesion to most thermoplastics.

Heat-cured Epoxy Adhesives — One-component, rigid adhesives with outstanding strength at elevated temperatures. These adhesives require a thermal cure, typically around 250-350°F (120-180°C) for 40-60 minutes.

MMA Acrylic Adhesives — Provides greater adhesion to a wide variety of materials including most plastics and paint systems, are tolerant of many surface contaminations. High impact resistance for metal bonds.


Low Odor Acrylic Adhesives — Less odor than typical acrylic adhesives and faster rate of strength build than most two-part structural adhesives. Excellent adhesion to a variety of materials, including plastics and paint systems. They provide high impact resistance for plastic bonds; and are tolerant of many surface contaminations.

LSE Acrylic Adhesives — Outstanding adhesion to polyolefin materials such as polypropylene, polyethylene and TPO without surface treatment.

Semi-rigid Urethane Adhesives — Higher tensile modulus and lower elongation capability, with greater long-term holding power.

Flexible Urethane Adhesives — Lower tensile modulus and higher elongation capability. Excellent adhesion to most plastics.

Step 1: Select Most Difficult Substrate Step 2: Determine Key Attribute Step 3: Select Product Family

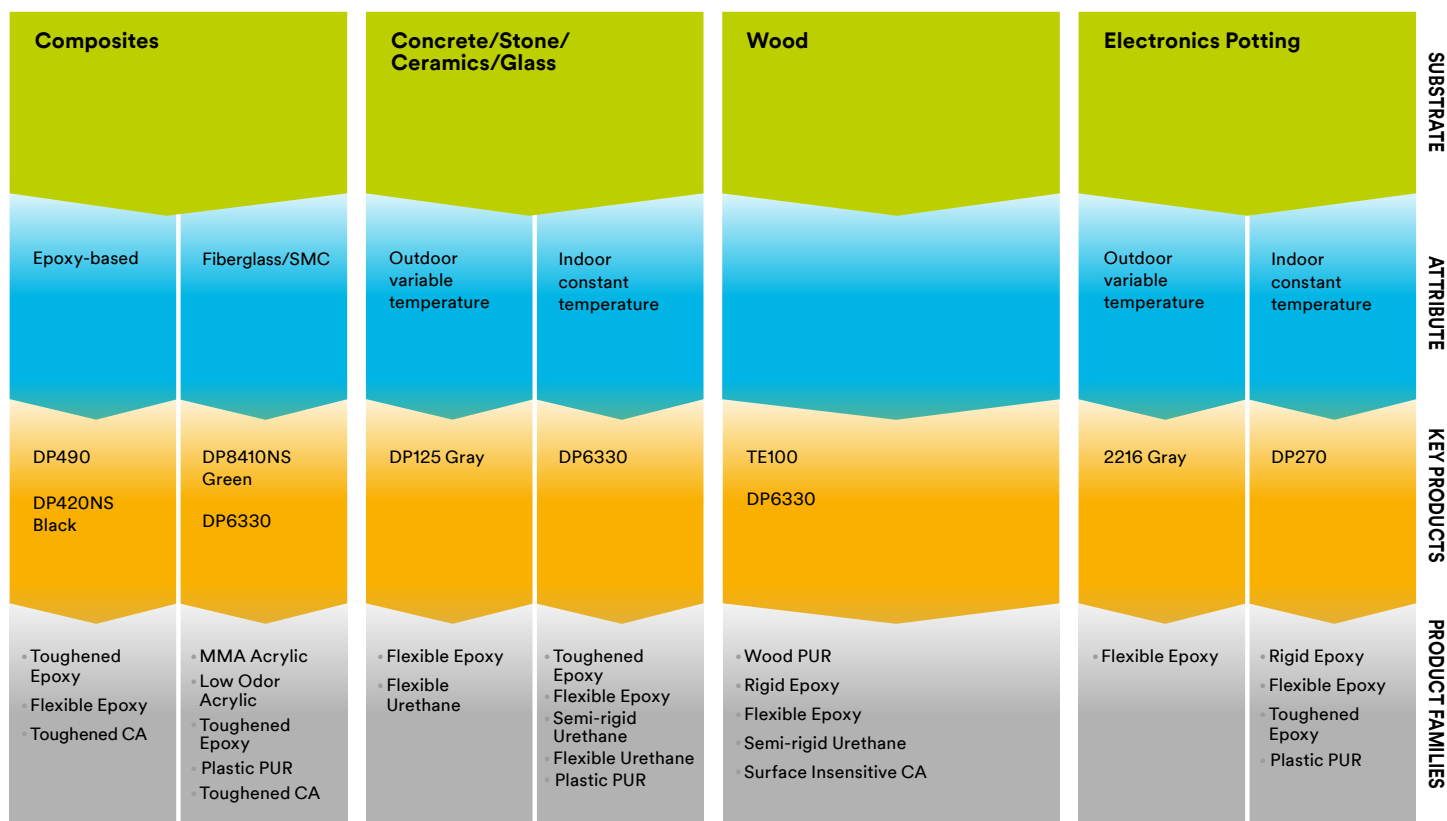

*See chart in back of guide for more details.

SUBSTRATE **ATTRIBUTE** **KEY PRODUCT** **PRODUCT FAMILIES**

General Purpose (EC) Instant Adhesives are slightly less expensive products that have lower strength and impact resistance compared to traditional instant adhesives.

Super Fast (SF) Instant Adhesives provide the fastest rate of cure speed for most applications.

Anaerobic Adhesive Families

Threadlockers (TL) hold screws and other threaded fasteners in place to prevent loosening from shock, vibration, and thermal expansion and contraction; these adhesives replace lock washers and nylon-insert nuts.

Pipe Sealants (PS) provide a pressure seal on threaded tubes and pipes; these adhesives replace various tapes and pastes.

PUR Adhesive Families

Wood PUR – Higher shear strength at lower elongations for long term holding power. Mostly used for rigid wood substrates and some plastics.

Plastic PUR – Higher impact strength, elongation and flexibility for greater capacity to withstand movement of bonded parts. Higher adhesion to most plastics, glass and aluminum.

Instant Adhesive Families

Plastic & Rubber (PR) Instant Adhesives bond to the widest variety of materials, have an extremely fast cure speed, and come in a wide range of viscosity.

Surface Insensitive (SI) Instant Adhesives cure even on acidic surfaces (such as wood, paper, leather, and ceramic); these adhesives have a slower cure speed than traditional instant adhesives.

Substrate Selector

Step 1: Select Substrate **Step 2: Determine Key Attribute** **Step 3: Select Product** (see definitions below)

		Plastic/Paints/Coatings		Rubber	Metals			Oily Metals		Composites		Concrete/Stone/Ceramics/Glass		Wood
		Low Surface Energy	General Purpose		Temperature and Solvent Resistant	Stainless Steel & Aluminum	Other Metals	Stainless Steel & Aluminum	Other Metals	Fiberglass/SMC	Epoxy	Indoor	Outdoor	
Plastic/Paints/Coatings	Low Surface Energy	LSE Acrylic* Plastic & Rubber CA	LSE Acrylic* Plastic & Rubber CA	Plastic & Rubber CA*	N/A	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic	LSE Acrylic Surface Insensitive CA*
	General Purpose	LSE Acrylic* Plastic & Rubber CA	LO Acrylic MMA Acrylic Plastic PUR Flexible Epoxy Plastic & Rubber CA	Plastic & Rubber CA* Plastic PUR	Toughened Epoxy Flexible Epoxy	LO Acrylic MMA Acrylic Flexible Epoxy Plastic PUR Plastic & Rubber CA	DP8407NS Toughened Epoxy Flexible Epoxy Plastic PUR Plastic & Rubber CA	LO Acrylic MMA Acrylic	DP8407NS	Semi-rigid Urethane MMA Acrylic LO Acrylic Flexible Urethane Plastic PUR	Semi-rigid Urethane MMA Acrylic Flexible Epoxy Toughened Epoxy Plastic PUR	Flexible Epoxy Rigid Urethane Flexible Urethane Plastic PUR	Flexible Epoxy Flexible Urethane Plastic PUR	Wood PUR Flexible Epoxy Rigid Urethane Surface Insensitive CA
	Rubber	Plastic & Rubber CA*	Plastic & Rubber CA* Plastic PUR	Plastic & Rubber CA*	N/A	Flexible Epoxy Plastic PUR	Flexible Epoxy Plastic PUR	N/A	N/A	Plastic & Rubber CA* Plastic PUR	Plastic & Rubber CA* Plastic PUR	Flexible Epoxy Plastic PUR	Flexible Epoxy Plastic PUR	Surface Insensitive CA* Plastic PUR Flexible Epoxy
Metals	Temperature and Solvent Resistant	N/A	Toughened Epoxy Flexible Epoxy	N/A	Toughened Epoxy Flexible Epoxy	Toughened Epoxy Flexible Epoxy	One-part 2214 Toughened Epoxy	2214	2214	Toughened Epoxy Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy	Flexible Epoxy	Toughened Epoxy Plastic PUR Flexible Epoxy
	Stainless Steel & Aluminum	LSE Acrylic	LO Acrylic MMA Acrylic Flexible Epoxy Plastic PUR Plastic & Rubber CA	Plastic & Rubber CA* Plastic PUR	Toughened Epoxy Flexible Epoxy	LO Acrylic MMA Acrylic Toughened Epoxy Flexible Epoxy Rigid Epoxy	2214 Toughened Epoxy	LO Acrylic MMA Acrylic	DP8407NS 2214	Semi-rigid Urethane MMA Acrylic LO Acrylic Toughened Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy MMA Acrylic LO Acrylic Plastic PUR	Toughened Epoxy Flexible Epoxy	Flexible Epoxy	Plastic PUR Toughened Epoxy Rigid Epoxy Flexible Epoxy Surface Insensitive CA
	Other Metals	LSE Acrylic	DP8407NS Toughened Epoxy Flexible Epoxy Plastic PUR Plastic & Rubber CA	Plastic & Rubber CA* Plastic PUR	2214 Toughened Epoxy	2214 Toughened Epoxy	Toughened Epoxy Flexible Epoxy 2214 DP810	DP8407NS 2214	DP8407NS 2214	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy 2214 Plastic PUR	Toughened Epoxy 2214	Flexible Epoxy	Plastic PUR Toughened Epoxy
Oily Metals	Stainless Steel & Aluminum	LSE Acrylic	LO Acrylic MMA Acrylic	N/A	2214	LO Acrylic MMA Acrylic	DP8407NS 2214	LO Acrylic MMA Acrylic	DP8407NS	MMA Acrylic LO Acrylic	MMA Acrylic LO Acrylic 2214	N/A	N/A	N/A
	Other Metals	LSE Acrylic	DP8407NS	N/A	2214	DP8407NS 2214	DP8407NS 2214	DP8407NS	DP8407NS 2214	DP8407NS	2214	N/A	N/A	N/A
	Fiberglass/SMC	LSE Acrylic	Semi-rigid Urethane MMA Acrylic LO Acrylic Flexible Urethane Plastic PUR	Plastic & Rubber CA* Plastic PUR	Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane MMA Acrylic LO Acrylic Toughened Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	MMA Acrylic LO Acrylic	DP8407NS	Semi-rigid Urethane MMA Acrylic LO Acrylic Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Rigid Urethane Flexible Epoxy Plastic PUR
Composites	Epoxy	LSE Acrylic	Semi-rigid Urethane MMA Acrylic Flexible Epoxy Toughened Epoxy Plastic PUR	Plastic & Rubber CA* Plastic PUR	Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy MMA Acrylic LO Acrylic Plastic PUR	Toughened Epoxy Flexible Epoxy 2214 Plastic PUR	MMA Acrylic LO Acrylic 2214	2214	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR
	Indoor	LSE Acrylic	Flexible Epoxy Rigid Urethane Flexible Urethane Plastic PUR	Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy	Toughened Epoxy Flexible Epoxy	Toughened Epoxy 2214	N/A	N/A	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Toughened Epoxy Flexible Epoxy Rigid Urethane Flexible Urethane	Flexible Epoxy Flexible Urethane	Flexible Epoxy Plastic PUR Flexible Urethane
	Outdoor	LSE Acrylic	Flexible Epoxy Flexible Urethane Plastic PUR	Flexible Epoxy Plastic PUR	Flexible Epoxy	Flexible Epoxy	Flexible Epoxy	N/A	N/A	Semi-rigid Urethane Flexible Epoxy Flexible Urethane Plastic PUR	Semi-rigid Urethane Flexible Epoxy Plastic PUR	Flexible Epoxy Flexible Urethane	Flexible Epoxy Flexible Urethane	Flexible Epoxy Plastic PUR Flexible Urethane
Concrete/Stone/Ceramics/Glass		LSE Acrylic Surface Insensitive CA*	Wood PUR Flexible Epoxy Rigid Urethane Surface Insensitive CA	Plastic PUR Surface Insensitive CA*	Toughened Epoxy Plastic PUR Flexible Epoxy	Plastic PUR Toughened Epoxy Rigid Epoxy Flexible Epoxy Surface Insensitive CA	Plastic PUR Toughened Epoxy	N/A	N/A	Semi-rigid Urethane Toughened Epoxy Rigid Urethane Flexible Epoxy Plastic PUR	Semi-rigid Urethane Toughened Epoxy Flexible Epoxy Plastic PUR	Flexible Epoxy Plastic PUR Flexible Urethane	Flexible Epoxy Plastic PUR Flexible Urethane	Wood PUR Rigid Epoxy Toughened Epoxy Rigid Urethane Surface Insensitive CA
	Wood													

BEST IN CLASS PRODUCT SUGGESTED ALTERNATE PRODUCT *with primer

3M™ Scotch-Weld™ Structural Adhesives

Coverage Guide

Approximate Coverages for 3M™ Scotch-Weld™ Adhesives in Duo-Pak Cartridges

Bead Size Dimension* mm	m per 45 mL (10:1 Cart.)	m per 48,5 - 50 mL (1:1 & 2:1 Cart.)	m per 400 mL (1:1 & 2:1 Cart.)	m per 490 mL (10:1 Cart.)
12.7 mm	0.7m	0.8 m	6 m	8 m
9.5 mm	1 m	1 m	11 m	14 m
6.4 mm	3 m	3 m	25 m	31 m
3.2 mm	11 m	13 m	101 m	123 m
1.6 mm	45 m	50 m	400 m	488 m

Coverages per liter for Various Thicknesses of 100% Solids 3M Adhesives

Wet Thickness mm	m ² /liter	liter/1,000 m ²
0.8 mm	1 m ²	794 liter
0.64 mm	1.5 m ²	635 liter
0.13 mm	8 m ²	127 liter

Coverages per liter for Various Bead Sizes of 100% Solids 3M Adhesives

Bead Size Dimension* mm	Approx. m/liter	Approx. liter/1,000m
12.7 mm	16 m	63 liter
9.5 mm	28 m	36 liter
6.4 mm	63 m	16 liter
3.2 mm	252 m	4 liter
1.6 mm	1,000 m	1 liter

* Bead size is semi-circular bead with width equal to size noted and height at center of bead equal to 1/2 the width.

NOTE: The technical information and data provided here should be considered representative or typical only and should not be used for specification purposes.

3M™ Scotch-Weld™ Low Odor and MMA Acrylic Adhesives

3M's Low Odor and MMA Acrylic Adhesives are designed for all of your sign application needs. They provide excellent impact strength, high peel strength and greatly extended shelf life compared to ordinary structural adhesives. With high structural strength, fast cure and environmental resistance, they are the first choice for the sign industry. DP8805NS, DP8810NS, DP8825NS, DP8405NS, DP8407NS, DP8410NS and DP8425NS



3M™ Scotch-Weld™ Rigid Epoxies

Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
							-55°C	24°C	82°C			
DP100 100 (Clear)	General purpose Rigid bonds	1:1	13,000	5 minutes	20 minutes	4	6	10	2	48.5mL 200mL 5 gal. pail A 5 gal. pail B	7100200484 7100075490 7100086557 7100086558	★
DP100FR 100FR (Off-White)	Flame retardant UL94 V-0 rating	1:1	80,000	6 minutes	20 minutes	4	9	15	6	48.5mL 400mL 5 gal. pail A 5 gal. pail B	7100148760 7000028577 7010366158 7010366123	★
DP100NS 100NS (Translucent)	General purpose Non-sag	1:1	95,000	5 minutes	20 minutes	4	6	10	2	48.5mL 200mL 400mL 5 gal. pail A 5 gal. pail B	7100148744 7100014024 7100082554 7010367412 7010295308	
DP270 270 (Black)	Rigid potting compound Non-corrosive	1:1	12,000	60 minutes	3 hours	4	8	17	2	48.5mL 400mL Gallon kit 5 gal. pail A 5 gal. pail B	7100200491 7100082565 7000121253 7000046463 7000046439	★ ★ ★ ★
DP270 270 (Clear)	Rigid potting compound Non-corrosive	1:1	12,000	60 minutes	3 hours	4	8	17	2	48.5mL 5 gal. pail A 5 gal. pail B	7100200493 7000028575 7000028567	★
1751 B/A (Gray)	Excellent void filler Rigid bonds	3:2	700,000	45 minutes	10 hours	7	10	14	3	Pint kit Quart kit Gallon kit 5 gal. pail A 5 gal. pail B	7000046336 7000046337 7000046339 7010309727 7010367210	
1838 B/A (Green)	Multi-purpose Rigid bonds	4:5	400,000	60 minutes	8 hours	7	10	21	3	2 oz. tube kit Quart kit 5 gal. pail A 5 gal. pail B	7000000810 7000046340 7010309728 7010367213	
3520 B/A (Translucent)	Tough durable bonds	1:1	12,000	230 minutes	8 hours	7	27	35	5	300mL kit 2 L kit 10 L kit	7100183880 7100185158 7100183879	★ ★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Flexible Epoxies

	Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
								-55°C	24°C	82°C			
KEY PRODUCT	DP100 Plus 100 Plus (Clear)	Very flexible Colorless	1:1	8,500	4 minutes	20 minute	98	21	24	1	48.5mL	7100148750	★
											200mL	7100069498	
											400mL	7000121255	★
											5 gal. pail A	7100046020	
											5 gal. pail B	7100084539	
	DP105 105 (Clear)	Very flexible Colorless	1:1	6,500	5 minutes	20 minute	89	24	14	1	48.5mL	7100200485	★
											5 gal. pail A	7000000856	
											5 gal. pail B	7000000850	
	DP110 110 (Gray)	General purpose Flexible bonds	1:1	55,000	8 minutes	20 minute	71	19	24	2	48.5mL	7100200487	★
											5 gal. pail A	7010299362	
											5 gal. pail B	7010299357	
	DP110 110 (Translucent)	General purpose Flexible bonds	1:1	50,000	8 minutes	20 minute	71	17	17	1	48.5mL	7100200486	★
											400mL	7000079998	★
											5 gal. pail A	7010366163	
											5 gal. pail B	7010366143	
KEY PRODUCT	DP125 125 (Gray)	High performance Very flexible bonds	1:1	52,500	25 minutes	2.5 hours	160	23	30	3	48.5mL	7100200488	★
											400mL	7100076727	★
											5 gal. pail A	7100084588	★
											5 gal. pail B	7100084538	★
	DP125 125 (Translucent)	High performance Very flexible bonds	1:1	15,000	25 minutes	2.5 hours	151	28	17	1	48.5mL	7100148734	★
	DP190 (Translucent)	High performance Flexible bonds	1:1	10,000	80 minutes	6 hours	107	24	8	1	48.5mL	7100148752	
	DP190 (Gray)	High performance Slightly flexible bonds	1:1	80,000	90 minutes	10 hours	89	10	17	3	48.5mL	7100200489	★
											400mL	7100200490	★
											2 Liter Kit	7000079884	
											10 Liter Kit	7000080020	★
											36 Liter Kit	7000080153	★
	2216 B/A (Gray)	High performance Very flexible bonds	2:3	80,000	90 minutes	10 hours	89	21	22	3	43mL Duo-Pak	7000046357	
											2 oz. tube kit	7000000812	★
											135 ml	7100141716	★
											250 ml	7100141986	★
											1.6 Liter Kit	7100141727	★
											33 Liter Kit	7000079979	★
											Pint kit	7000046358	
											Quart kit	7000000815	
											5 gal. pail A	7000046361	★
											5 gal. pail B	7000046360	★
	2216 B/A (Translucent)	General purpose Very flexible bonds	1:1	10,000	2 hours	14 hours	125	21	12	1	2 oz. tube kit	7000046479	
											Quart kit	7000000861	
											Gallon kit	7000046480	
											5 gal. pail A	7000046494	
											5 gal. pail B	7000121307	
	7838 B/A (Tan)	General purpose Flexible bonds	10:12	160,000	180 minutes	12 hours	27	18	23	6	2 kg kit	7100185187	★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Toughened Epoxies

Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
							-55°C	24°C	82°C			
DP410 (Off-White)	Tough durable bonds High impact resistance	2:1	70,000	12 minutes	80 minutes	96	28	38	8	50mL	7100200494	★
										400mL	7100200495	★
										5 gal. pail A	7100055705	★
										5 gal. pail B	7100055833	★
DP420 420 (Black)	Tough durable bonds High impact resistance	2:1	30,000	20 minutes	2 hours	133	31	31	9	50mL	7100148731	★
										200mL	7100007956	★
										400mL	7100077148	
										Gallon Kit	7000046381	
										5 gal. pail A	7000000834	
										5 gal. pail B	7000000827	
DP420 (Off-White)	Tough durable bonds High impact resistance	2:1	30,000	20 minutes	2 hours	125	31	31	9	50mL	7100148736	
										200mL	7100077136	
										400mL	7100002516	
										5 gal. pail A	7100001144	
DP420NS 420NS (Black)	Tough durable bonds Non-sag	2:1	180,000	20 minutes	2 hours	107	31	31	9	50mL	7100148758	★
										400mL	7100010680	★
										5 gal. pail A	7000000857	★
										5 gal. pail B	7000000853	
DP460 460 (Off-White)	Tough durable bonds	2:1	30,000	60 minutes	4 hours	142	31	31	5	43 gal. drum A	7100084536	★
										43 gal. drum B	7100084537	
										50mL	7100200496	
										400mL	7100200498	
										1.5 Liter Kit	7000079883	
										60 Liter Kit	7000079870	
DP490 (Black)	Tough durable bonds	2:1	90,000	90 minutes	4 hours	60	25	31	14	5 gal. pail A	7000000876	★
										5 gal. pail B	7000000875	
										55 gal. drum A	7010366165	
										55 gal. drum B	7100153215	
7240	Tough durable bonds	2:1	120,000	45 Min	6 hours	92	18	27	12	50mL	7100200499	★
										400mL	7100200501	★
										54 Liter Kit	7000079900	★
										160 Liter A	7100199149	★
7260 FC 7260 NS 7260 FC NS	Tough durable bonds with high shear and peel strength	2:1	280,000 700,000 700,000	100 minutes 400 minutes 100 minutes	7 hours 18 hours 7 hours	48	24	33	10	160 Liter B	7100199097	★
										200mL	7100018776	★
										400mL	7000080008	★
										400mL	7000080037	★
7260 FC NS										54 Liter Kit	7000080132	★
												★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Heat-Cured Epoxies

Product (Color)	Key Features	Approx. Viscosity at 24°C	Cure Conditions		Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa				Size	Stock #
			Time (min.)	Temp. C		-55°C	24°C	82°C	121°C		
2214 Hi-Temp New Formula (Gray)	High temperature strength Environmental resistance	Paste	60	121	4	19	19	19	17	6 oz. cart. 310 ml 1 Liter 5 gal. pail	7000046474 7000080325 7000079791 7010330200
2214 Regular (Gray)	High temperature strength Low temp curing	Paste	40	121	9	21	31	31	10	6 oz. cart. 1 quart 5 gal. pail	7000000811 7000046356 7100111206

3M™ Scotch-Weld™ Primer

Product (Color)	Key Features	Viscosity	Color	Dry time (24°C-33°C)	Dry time (88°C)	Size	Stock #
Metal Primer 3901	Improves metal and glass adhesion and increases environmental resistance	5	Red	1 hour	30 minutes	1/2 pint	7000000907

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Threadlockers

3M's Threadlocker Adhesives offer a range of products including temporary, permanent and high temperature resistance. These adhesives conform to most industry recognized standards for torque and strength. **TL70, TL42, TL43 and TL77**



3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus

3M™ Scotch-Weld Epoxy Adhesive DP100 Plus is a very flexible, fast-setting, two-part epoxy adhesive that cures clear and colorless. It provides a strong, permanent bond, even under vibration and impact and is flexible when cured, making it a good choice for bonding dissimilar surfaces.



3M™ Scotch-Weld™ Standard MMA Acrylics

	Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
								-29°C	24°C	82°C			
KEY PRODUCT	DP8405NS 8405NS (Green)	High impact Adhesion to most plastics	10:1	70,000	5 minutes	15 minutes	89	18	28	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100009688 7100011056 7100102180 7100027430 7100101506 7100084534	★ ★ ★ ★ ★
	DP8407NS 8407NS (Gray)	High impact Adhesion to most plastics	10:1	20,000	7 minutes	24 minutes	89	23	31	10	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100179482 7100179480 7100179264 7100105384 7100179442 7100104987	★ ★ ★ ★ ★
	DP8410NS 8410NS (Green)	High impact Adhesion to most plastics	10:1	70,000	10 minutes	25 minutes	89	25	28	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100024055 7100024045 7100102180 7100084532 7100101506 7100084535	★ ★ ★ ★ ★
	DP8425NS 8425NS (Green)	High impact Adhesion to most plastics	10:1	70,000	25 minutes	50 minutes	89	26	26	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100078165 7100078166 7100102180 7010415048 7100101506 7100084535	★ ★ ★ ★ ★

3M™ Scotch-Weld™ Low Odor Acrylics

KEY PRODUCT	DP810 810 (Tan)	Tough durable bonds High impact resistance	1:1	20,000	10 minutes	20 minutes	53	8	25	3	48.5mL 400mL 10 Liter Kit	7100200509 7100200483 7000079966	★ ★ ★
	DP8805NS 8805NS (Green)	Low odor Fast rate of strength build	10:1	80,000	5 minutes	10 minutes	53	5	25	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100098631 7100097636 7100102180 7100097693 7100101506 7100097673	★ ★ ★ ★ ★
	DP8810NS 8810NS (Green)	Low odor Fast rate of strength build	10:1	80,000	10 minutes	20 minutes	53	6	25	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100097574 7100075409 7100102180 7100097704 7100101506 7100097626	★ ★ ★ ★ ★
	DP8810NS (Gray)	Low odor Fast rate of strength build	10:1	80,000	10 minutes	20 minutes	53	6	25	6	45mL	7100097474	
	DP8825NS 8825NS (Green)	Low odor Fast rate of strength build	10:1	80,000	25 minutes	50 minutes	36	7	21	6	45mL 490mL 1 gal. pail A 5 gal. pail B 5 gal. pail A 55 gal. drum B	7100067297 7100068120 7100102180 7100067291 7100101506 7100084533	★ ★ ★ ★ ★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Low Surface Energy (LSE) Acrylics

Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
							-29°C	24°C	66°C			
DP8005 (Black)	Bonds polyolefins and low surface energy materials	10:1	25,000	3 minutes	3 hours	N/A	6	14	3	45mL 490mL	7100089475 7100089476	★ ★
DP8005 (Off-White)	Bonds polyolefins and low surface energy materials	10:1	25,000	3 minutes	3 hours	N/A	5	15	3	38mL 265mL 10 Liter pail B 2 Liter pail A	7000080088 7000079932 7000080038 7000080039	★ ★ ★ ★
DP8010 8010 (Blue)	Bonds polyolefins and low surface energy materials	10:1	20,000	10 minutes	1 hour	N/A	19	19	3	45mL 490mL	7100036717 7100036719	★ ★
DP8010NS 8010NS (Blue)	Bonds polyolefins and low surface energy materials Non-sag	10:1	65,000	10 minutes	1 hour	N/A	19	19	3	45mL 490mL	7100036721 7100036723	

3M™ Scotch-Weld™ Semi-Rigid Urethanes

Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
							-40°C	24°C	82°C			
DP600 600 (Gray)	Concrete repair Self-leveling	1:1	6,000	1 minute	4 minutes	36	22	16	5	250mL 5 gal. pail A 5 gal. pail B	7000080110 7010130543 7010170293	★
DP6310NS (Green)	Multi-purpose Energy absorbing	1:1	Non-sag paste	9 minutes	45 minutes	36	24	25	6	48.5mL 400mL 5 gal. pail A 5 gal. pail B 50 gal. drum A 50 gal. drum B	7100109829 7100109830 7100143960 7100143915 7010415316 7010412199	★ ★
DP6330NS (Green)	Multi-purpose Energy absorbing	1:1	Non-sag paste	30 minutes	2 hours	36	25	25	7	48.5mL 400mL 5 gal. pail A 5 gal. pail B 50 gal. drum A 50 gal. drum B	7100109828 7100109827 7100143961 7100143701 7010409611 7010366145	★ ★
3535 B/A (Off-White)	Multi-purpose Semi-rigid bonds	1:1	30,000	3 minutes	30 minutes	44	17	14	2	2 oz. kit 5 gal. pail A 5 gal. pail B	7000046483 7010366160 7010330223	

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Flexible Urethanes

Product (Color)	Key Features	Mix Ratio (Volume) B:A	Approx. Viscosity at 24°C	Approx. Mixed Work Life at 24°C	Approx. Time to Handling Strength at 24°C	Floating Roller Peel N/cm at 24°C	Overlap Shear: MPa			Size	Stock #	
							-40°C	24°C	82°C			
DP604NS 604NS (Black)	Flexible Non-sag	1:1	Paste	4 minutes	20 minutes	53	10	4	2	48.5mL 400mL 5 gal. pail A 5 gal. pail B 55 gal. drum A 55 gal. drum B	7100148738 7100069452 7010365926 7010367265 7010329538 7010412243	★
DP620NS 620NS (Black)	Semi-flexible Non-sag	1:1	Paste	20 minutes	4 hours	71	21	17	3	48.5mL 400mL 5 gal. pail A 5 gal. pail B 55 gal. drum A 55 gal. drum B	7100148737 7000046372 7010329537 7010367262 7010301034 7010309744	★ ★
DP609 (Tan)	Flexible	1:1	30,000	7 minutes	45 minutes	70	17	14	2	48.5mL 400mL	7100200502 7000080396	★ ★
3549 (Brown)	Tough flexible bonds	1:1	25,000	60 minutes	8 hours	107	21	14	3	2 oz. kit 5 gal. pail A 5 gal. pail B	7000046484 7100041738 7100041737	

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Low Surface Energy (LSE) Plastic Bonding Adhesives

3M's Low Surface Energy Structural Acrylic Adhesives bond to low surface energy plastics such as Polypropylene (PP), Polyethylene (HDPE) and most Thermoplastic Polyolefins (TPOs), providing structural adhesive bond strength that causes the plastic material to fail before the adhesive bond. **DP8010 Blue**



3M™ Scotch-Weld™ Concrete Repair Adhesives

3M's Concrete Repair Urethane Adhesives repair cracks and patch holes in minutes, providing minimal disruption to your operations. Products are available for both horizontal and vertical surfaces. **DP600**



3M™ Scotch-Weld™ PUR Adhesives – Wood Bonders

Product (Color)	Key Features	Viscosity @ 121°C	Approximate Open Time at 24°C	Approximate Time to Handling Strength at 24°C	Shore D	Elongation %	Size	Stock #	
EZ250015 (Off-White)	Fast set time	7,000	1.5 minutes	15 seconds	65	750	1/10 gal. 5 gal.	7000046529 7010310232	
EZ250060 (Off-White)	Medium set time	7,000	2 minutes	60 seconds	60	675	1/10 gal. 5 gal.	7000046531 7010329734	
EZ250120 (Off-White)	Medium set time Low viscosity Thin bond lines	3,000	4 minutes	120 seconds	60	625	1/10 gal.	7000046532	
TE015 (Off-White)	Fast set time	7,000	1.5 minutes	15 seconds	65	750	1/10 gal. 5 gal.	7000046472 7010367438	
TE030 (Off-White)	Fast set time High viscosity	16,000	1 minute	30 seconds	60	725	1/10 gal. 5 gal. 55 gal. drum	7000046536 7010310236 7010367598	
TE100 (Off-White)	Medium set time Thin bond lines	7,000	2 minutes	60 seconds	61	675	1/10 gal. 5 gal.	7000028590 7010295326	★
TE200 (Off-White)	Medium set time Low viscosity Thin bond lines	3,000	4 minutes	120 seconds	60	625	1/10 gal. 2 kilo	7000000905 7000046540	★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.


★ These products are in stock

3M™ Scotch-Weld™
PUR Easy 250
Applicator



3M™ Scotch-Weld™ PUR Adhesives

PUR Adhesives enhance productivity with fast green strength. Shorter clamp times and reduced need for third-hand mechanical fasteners help speed up your production process without sacrificing ultimate strength.

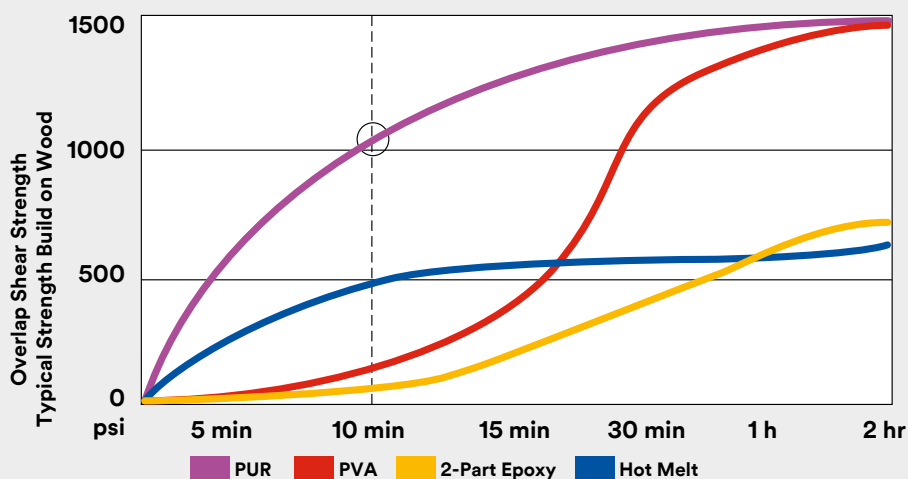

3M™ Scotch-Weld™ PUR Adhesives – Plastic Bonders

Product (Color)	Key Features	Viscosity @ 121°C	Approximate Open Time at 24°C	Approximate Time to Handling Strength at 24°C	Shore D	Elongation %	Size	Stock #	
EZ250030 (Off-White)	Fast set time, bonds a wide variety of plastics	13,000	2 minutes	30 seconds	50	725	1/10 gal. 5 gal	7000046530 7000121357	
EZ250150 (Off-White)	Long open time, bonds plastics to metal, glass, wood	9,000	4 minutes	150 seconds	45	700	1/10 gal. 2 kilo 5 gal	7000046533 7010295325 7010367590	
EZ250200 (Off-White)	Long open time, low viscosity, bonds plastics, wood, and many other material combinations	2,750	3 minutes	120 seconds	30	400	1/10 gal. 2 kilo	7000046538 7010367604	
TE031 (Black)	Fast set time, bonds a wide variety of plastics	13,000	2 minutes	30 seconds	50	725	1/10 gal. 5 gal.	7000000903 7100031123	★ ★
TE031 (Off-White)	Fast set time, bonds a wide variety of plastics	13,000	2 minutes	30 seconds	50	725	1/10 gal. 2 kilo 5 gal	7000000902 7000028589 7100096731	★ ★ ★
TS230 (Black)	Extrudable/sprayable, long open time, bonds plastics to metal, glass, wood	9,000	4 minutes	150 seconds	45	700	1/10 gal. 2 kilo 5 gal. 55 gal. drum	7000000906 7000046541 7000121361 7100179521	★
TS230 (Off-White)	Extrudable/sprayable long open time, bonds plastics to metal, glass, wood	9,000	4 minutes	150 seconds	45	700	1/10 gal. 2 kilo 18 kg 55 gal. drum	7000000898 7000046534 7000080044 7100104259	★ ★ ★ ★
Purge Material 3756	Purge PUR adhesives from bulk dispensing equipment	8250	N/A	N/A	N/A	N/A	5 gal.	7000121333	

KEY PRODUCT

3M™ Scotch-Weld™ PUR Applicator/Preheater/Hardware

Product	Description	Stock #	
Applicator	PUR Easy 250 Applicator, pneumatically dispenses 1/10 gal. cartridges, US 120V	7000000958	
Cartridge Nozzle	High Temperature Nozzles for PUR 1/10 gal. cartridges (Sample, 5/bag)	7000031234	
Repair Kits and Replacement Parts	Adhesive Applicator Housing/Shroud Assembly Kit Applicator Nozzle Shroud Applicator Air Coupler Filter Kit Applicator Air Supply Line Kit Applicator Air Valve Kit Applicator Swivel Connector Applicator End Cap Applicator Heat Tube (240V)	7000028623 7000148288 7000046665 7000046668 7000046652 7000046653 7000046666 7000046673	
Alternate Nozzle System not for use with disposable nozzles	Applicator Main Nozzle Assembly (includes nozzle, tip, tip cap and valve) Applicator Main Nozzle Applicator Extension Tip, .072 in orifice Applicator Tip, .125 in orifice Applicator Tip, .063 in orifice Applicator Tip Cap Applicator Valve Assembly	7000027561 7000046672 7000046669 7000046671 7000046670 7100005819 7000046650	★ ★ ★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Instant Adhesives – Plastic and Rubber

Product (Color)	Key Features	Typical Viscosity	Temperature Range	Time to Handling	Full Cure (Hours)	Size	Stock #	
PR20	General purpose, low viscosity plastic bonder	20	-54° to 82°C	10-20 sec.	24	20 gram bottle 500 gram bottle	7100034093 7100033987	★
KEY PRODUCT PR100 (Clear)	General purpose, low viscosity plastic bonder	100	-54° to 82°C	10-20 sec.	24	20 gram bottle	7100033134	★
						50 gram bottle	7100034945	★
						500 gram bottle	7100033009	★
						20 kilo bottle	7100059686	
PR1500 (Clear)	General purpose, high viscosity for gap filling	1,500	-54° to 82°C	20-60 sec.	24	50 gram bottle 500 gram bottle	7100034078 7100034071	★ ★

3M™ Scotch-Weld™ Instant Adhesives – Surface Insensitive

SI Gel (Clear)	Fast cure, gel viscosity for max gap filling	Gel	-54° to 82°C	20-60 sec.	24	20 gram bottle 300 gram cart.	7100034068 7100078076	★ ★
SI100 (Clear)	Low viscosity for medium gaps	100	-54° to 82°C	3-20 sec.	24	3 gram tube 20 gram bottle 50 gram bottle 500 gram bottle	7100034526 7100034075 7100034966 7100034968	
SI1500 (Clear)	High viscosity for gap filling	1,500	-54° to 82°C	5-60 sec.	24	20 gram bottle 50 gram bottle	7100034140 7100040833	★

3M™ Scotch-Weld™ Instant Adhesives – Super Fast

Product (Color)	Key Features	Typical Viscosity	Temperature Range	Time to Handling	Full Cure (Hours)	Size	Stock #	
SF20 (Clear)	Fast cure Optimum performance on wide range of rubbers and plastics	20	-54° to 82°C	4-30 sec.	24	20 gram bottle 500 gram bottle	7100034529 7100040837	★ ★
SF100 (Clear)	Fast cure, high strength with EPDM and other elastomers	100	-54° to 82°C	4-30 sec.	24	20 gram bottle 50 gram bottle 500 gram bottle	7100034522 7100034525 7100034521	★ ★ ★

3M™ Scotch-Weld™ Instant Adhesive Primers & Activators

Product (Color)	Key Features	Typical Viscosity	Time to Handling	Full Cure (Hours)	Size	Stock #	
AC77	Instant adhesive primer for bonding of difficult-to-bond plastics such as polyethylene, polypropylene and polyacetal	<3	1-5 sec.	24	20 ml bottle 1 Liter bottle	7100027600 7100027284	★ ★

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock

3M™ Scotch-Weld™ Anaerobic Adhesives – Threadlockers

Product (Color)	Key Features	Typical Viscosity	Temperature Range	Time to Handling	Full Cure (Hours)	Size	Stock #	
TL42 (Blue)	Nutlock - medium strength, general purpose	1,200	-54° to 149°C	< 30 minutes	24	10mL bottle 50mL bottle 250mL bottle	7100034098 7100034097 7100034072	★
TL43 (Blue)	Oil tolerant, medium strength, general purpose	3,300	-54° to 149°C	< 30 minutes	24	50mL bottle 250mL bottle	7100041441 7100034865	★
TL70	High Strength Threadlocker	500	-54° to 149°C	< 30 minutes	24	50mL bottle 250mL bottle	7100034948 7100034849	★
TL77 (Red)	Heavy duty permanent for fasteners up to 1.5" (38mm) with coarse threads	7,000	-54° to 149°C	< 30 minutes	24	50mL bottle	7100038708	★

3M™ Scotch-Weld™ Anaerobic Adhesives – Pipe Sealants

PS77 (Yellow)	Fast curing pipe sealant with medium-high viscosity	18,000	-54° to 204°C	15-30 mins	24	50mL tube	7100034142	★
---------------	---	--------	---------------	------------	----	-----------	------------	---

For lead times on bulk adhesives, please contact your 3M representative.

KEY PRODUCT Denotes product to consider first in this category

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

★ These products are in stock









3M™ Scotch-Weld™ Plastic and Rubber Instant Adhesives



The PR (Plastic & Rubber) series of products bonds to most plastics and rubbers with a range of viscosities that will fit all your application needs. Just a single drop per square inch bonds several thousand pounds of holding power. They provide proven, world record strength with a hold of 8 metric tons. PR20, PR100 and PR1500











Applicators

Product	Stock #	Product Features	
Manual Applicator for 35 ml/38 ml/45 ml/48,5 ml/50 ml cartridges	7100205939	<ul style="list-style-type: none"> • Lightweight and mobile handset • Suitable for smaller and medium volumes 	
Manual Applicator for 200 ml cartridges	7000046632	<ul style="list-style-type: none"> • Mobile handset 	
Manual Applicator for 400 ml cartridges	7000043081	<ul style="list-style-type: none"> • Suitable for big volumes 	
Pneumatic Applicator for 50 ml cartridges	7000070273	<ul style="list-style-type: none"> • Allows precise and fatigue-free work 	
Pneumatic Applicator for 400 ml cartridges	7000110542	<ul style="list-style-type: none"> • Allows precise and fatigue-free work 	
Pneumatic Applicator for 490 ml cartridges	7000062908	<ul style="list-style-type: none"> • Allows precise and fatigue-free work 	

Plungers

Product	Stock #	
Plunger for 2:3	7010309947	
Plunger for 10:1	7000062909	
Plunger for 1:1 and 2:1	7000006768	

Nozzles

Product	Stock #	approx. length in mm	
Quadro mixing nozzle for 45 ml cartridges	7100202930	90	
Quadro mixing nozzle for 48,5 ml or 50 ml cartridges	7100104991	85	
Quadro mixing nozzle for 200 ml cartridges	7000062444	145	
Quadro mixing nozzle for 490 ml cartridges	7100015959	240	
Mixing nozzle for 38 ml cartridges	7000034634	105	
Mixing nozzle for 250 ml or 265 cartridges	7000087692	185	
Mixing nozzle for 400 ml cartridges	7000043674	275	
Mixing nozzle for 400 ml cartridges (DP6310/6330)	7000028616	127	

Click these links to see how 3M™ Scotch-Weld™ Structural Adhesives show unbelievable feats of strength and how our customers solved their challenges. We Help You Make It. Better.

Surface Preparation Tips

The following surface preparation steps are generally recommended for most substrates and structural adhesives. See Technical Data Sheets for more specific recommendations.

METALS

1. Safely wipe surface with acetone or methyl ethyl ketone (MEK) using a clean cloth. A heavier degreaser may be needed if the substrate contains a layer of processing oil.
2. Lightly abrade surface with sandblasting, fine grit sandpaper or 3M™ Scotch-Brite™ 7447 maroon pads.
3. Wipe surface with acetone or MEK to remove debris.
4. Allow surface to dry before applying adhesive.

PLASTICS AND RUBBERS

1. Lightly abrade surface with sandblasting, fine grit sandpaper or 3M™ Scotch-Brite™ 7447 maroon pads.
2. Wipe surface with isopropyl (IPA) alcohol using a clean cloth to remove debris.
3. Allow solvent to evaporate before applying adhesive.

GLASS

1. Wipe surface using a clean cloth with solvent containing 0.5 wt% silane adhesion promoter or wipe with 3M™ Scotch-Weld™ Metal Primer 3901.
2. Allow solvent to evaporate before applying adhesive.



Industrial Adhesives & Tapes Division

3M Belgium bvba/sprl
Hermeslaan 7
1831 Diegem

3M Nederland B.V.
Molengraaffsingel 29
2629 JD Delft

3M, Scotch-Weld, EPX and
Scotch Brite are trademarks
of 3M Company.

Please recycle.

© 2019 3M. All rights reserved.
78-9236-7114-9

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information. **Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property. **Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. **3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE.** If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price. **Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.